Rolmaster CONVEYORS SINCE 1946

"PROFESSIONAL CONVEYING SOLUTIONS"

LINE SHAFT CONVEYORS


DESCRIPTION:

Line Shaft Conveyors are primarily used for box, tote or tray transportation as well as minimum pressure accumulation within a conveying system. They are designed for flat-bottomed, evenly distributed loads. These powered conveyors are useful for the transportation of a wide variety of products. Maintenance requirements are relatively inexpensive. Rolmaster offers a variety of flow control devices including: diverters, stops, separators, lift gates, and pop-up transfers.



SPECIFICATIONS:

	1418HS	1916HS	2514HS
OVERALL LENGTH (DRIVEN)	24” TO 120”	24” TO 120”	24” TO 120”
OVERALL LENGTH (SLAVE)	18” TO 120”	18” TO 120”	18” TO 120”
OVERALL WIDTH	15” to 30”	15” to 51”	15” to 57”
ROLLER CENTERS	1 ½”, 3”, 4 ½”, 6”	3”, 4 ½”, 6”	3”, 4 ½”, 6”
BETWEEN FRAME RAILS	12” TO 27”	12” TO 48”	12” TO 54”
ROLLERS	1 ⅜” DIA X 18GA GALVANIZED STEEL - 5⁄16” HEX AXLE	1.9” DIA X 16 GA GALVANIZED STEEL - 7⁄16” HEX AXLE	2 ½” DIA X 14 GA GALVANIZED STEEL - 11⁄16” HEX AXLE
BEARINGS	Precision, Oiled	Precision, Greased	Precision, Greased
SIDE CHANNELS	7 ½” x 1 ½” x 11GA	7 ½” x 1 ½” x 11GA	7 ½” x 1 ½” x 11GA
FRAME MATERIAL	PLAIN STEEL	PLAIN STEEL	PLAIN STEEL
FINISH	BLUE (RAL 5017)	BLUE (RAL 5017)	BLUE (RAL 5017)

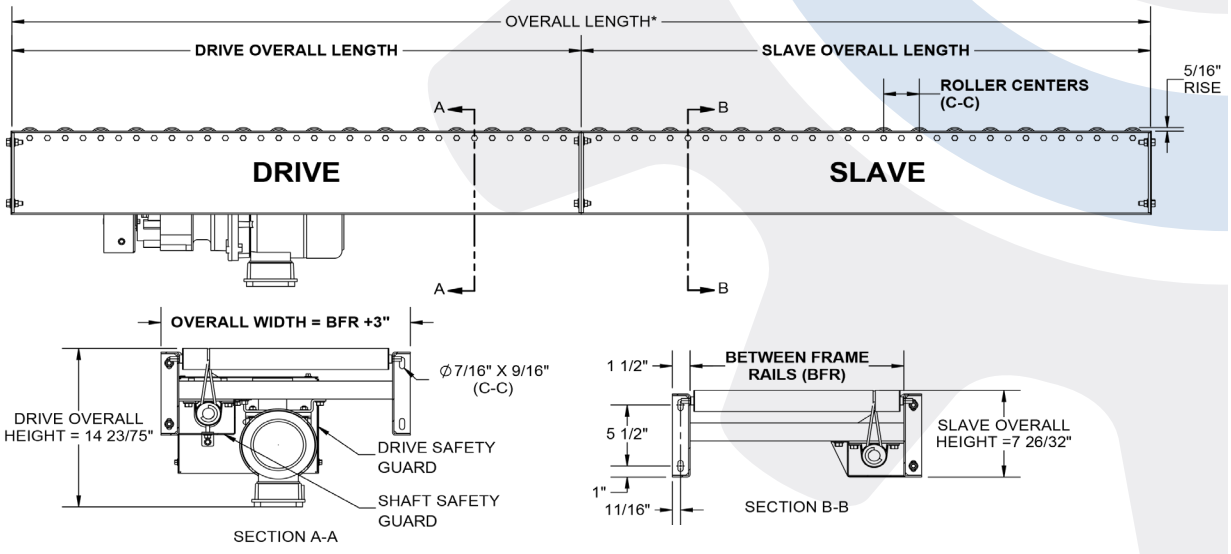

Rolmaster has been designing and manufacturing standard and highly customized systems for over 75 years. Trust the experts.